

DWE™

Internet-connected data logger for DicksonOne

This Quick-start Guide presents an overview of the Dickson DWE data logger, with setup and connection instructions to get your device up and running on Ethernet or Wi-Fi. You can then [register the device](#) in DicksonOne to view data online, configure alarms, and much more.

Safety instructions



The latest safety instructions document is available for download from the Dickson website. Flash this QR code to access the document




What's in the box

Hardware



DWE with replaceable sensor connected
(your sensor may differ from this image)



AC power adapter



Wall mount plates with screws

Cables



USB Cable (1 per order and may not be included in the box)



Ethernet cable

Data logger features



1. Power button
2. USB Port for flash drives
3. Mini USB for connecting to computer
4. Reset min/max button & transmit
5. Replaceable sensor in sensor port



1. Text area for registration and error codes
2. Current reading
3. Channel and variable
4. Min/Max for displayed channel
5. Ethernet port
6. AC adapter port

Setup

1. Plug the sensor into the sensor port on the data logger and press firmly until it clicks.
2. Plug the AC adapter power cable into the port on the data logger and the AC adapter into a standard power outlet (international plug adapters are available).
3. Press and hold the power button for 3 seconds until the device powers on, then release. The LED will flash green, then white. Sensor readings will begin to display, cycling through the different channels if more than one environmental condition is being monitored.

Note: "Error 202" will appear on the data logger screen. This message indicates that the device is not connected to the network. Follow the instructions below to connect to a network and register the device in DicksonOne.


Connecting DWE via Ethernet

1. After following steps 1-3 above, with the data logger powered on, plug one end of the Ethernet cable into the data logger and the other into an active Ethernet jack.
2. Once the logger is connected to the network, a 6-digit code will appear on the logger's screen that can be used to [register the device](#) in DicksonOne.


Connecting DWE via Wi-Fi

Note: When you connect the DWE data logger to Wi-Fi, it **will only use Wi-Fi** and not Ethernet, even if the device is still connected via an Ethernet cable.

1. In your DicksonOne account, select **Support** → **Network Configuration App**, or open the following URL: <https://www.dicksonone.com/network-configuration-app>
2. Download and install the Wi-Fi configuration tool for your operating system (MacOS or Windows), then open the application.
3. Connect the USB cable to the USB port on the data logger and connect the other end to an open port on your computer. Make sure the data logger is powered on.
4. Click on **Wi-Fi** and select your network after the device switches to Wi-Fi mode.

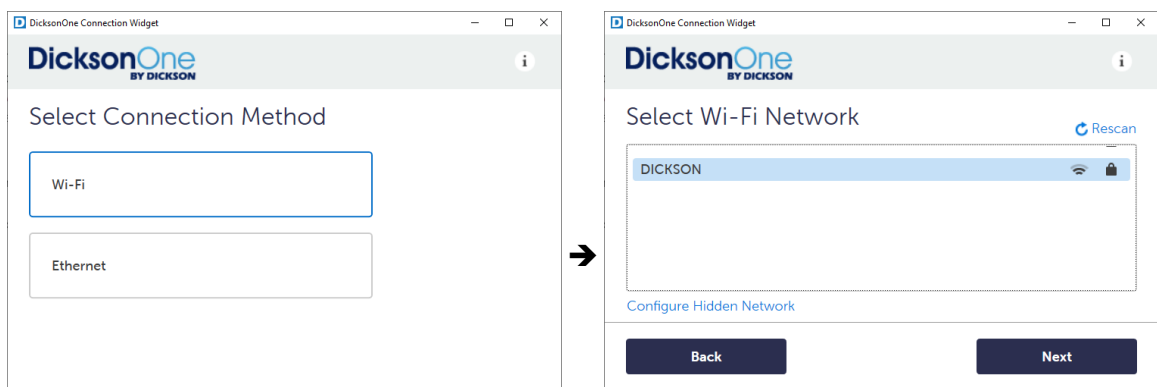

5. Click on **Next**, then enter the appropriate Wi-Fi settings and password.
6. Click on **Next** to connect to the network and confirm the connection with DicksonOne.

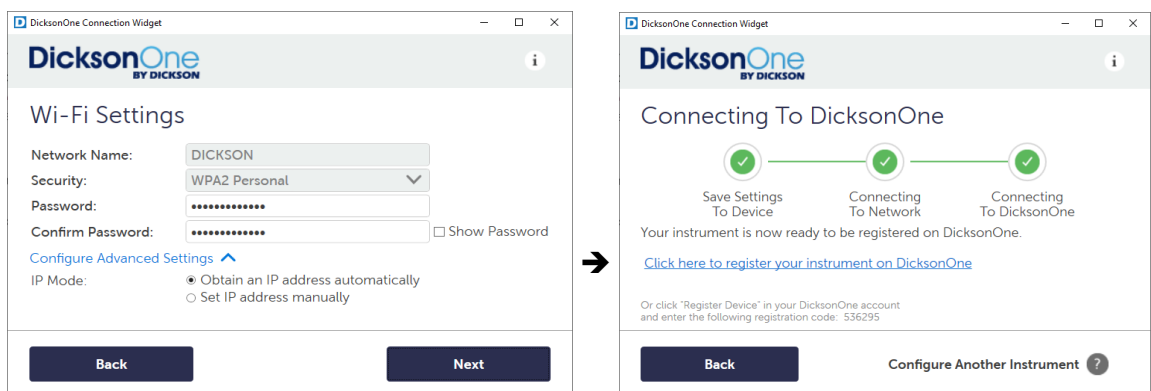

7. You can now [register your DWE logger](#) to your DicksonOne account using the 6-digit registration code displayed on the loggers screen or click **Configure Another Instrument** if you need to configure more data loggers.

**Dickson Europe**

Montpellier – France
+33 499 13 67 30
contact@dicksondata.fr

Dickson North America

Addison, IL – USA
+1 (630) 543-3747
contact@dicksondata.com

Dickson Asia-Pacific

Petaling Jaya – Malaysia
+603 749 40758
contact@dicksondata.my

©2024 Dickson. All rights reserved. Dickson, the Dickson logo, DicksonOne, and DWE are the exclusive property of Dickson. All other brands mentioned are the property of their respective owners. This is a non-contractual document. Product photos and features may vary.

September 2024

Ref: ING-INS-204-EN

Rev. 01